

SPM 210 TCE* COD. 7130000050
SPM 300 TCE* COD. 7140000050



LINEA PROFESSIONALE
PROFESSIONAL RANGE
GAMME PROFESSIONELLE
PROFISERIE
LINEA PROFESIONAL


***TCE**

Telecomando a 24v
24v Remote Control Wired
Telecommande avec 24v
Fernbedienung 24v
Telecomando a 24v



ACCESSORI

ACCESSORIES - ACCESSOIRES - ZUBEHÖR - ACCESORIOS

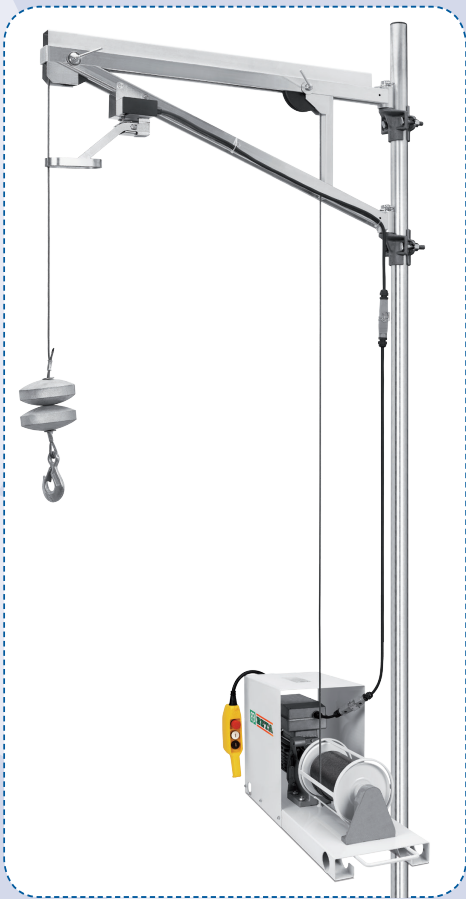



cod. 8050601800 (25 MT)

cod. 8050602000 (35 MT)

cod. 8050601900 (40 MT)

Prolunga 25/35/40 mtc cavo

Cable extension

Câble extension

Verlängerung stahlseil

Cable prolongación



cod. 9295814000

Bandiera di rinvio

Supporting transmission

Potence de renvoi

Vorgelege

Soporte de reenvío

cod. SPM0700000


Maniglioni


Handles

Poignées


Handgriffe

Manillas

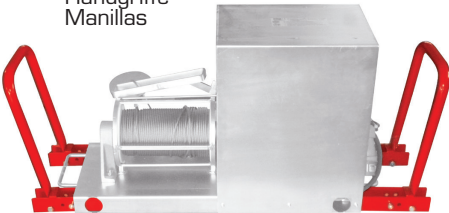

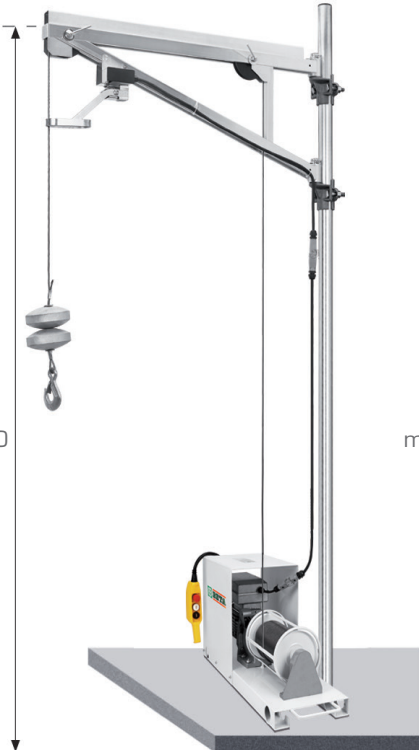

m 40

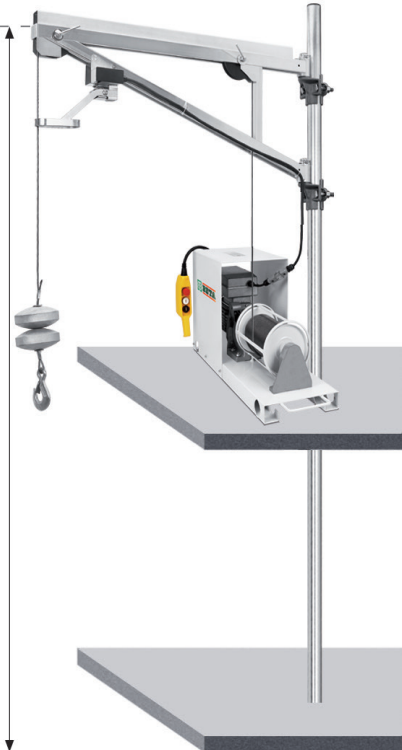

m 80

MODELLO - MODEL - MODÈLE - MODELL - MODELO	SPM 210 TCE	SPM 300 TCE
TIPO MOTORE - MOTOR TYPE - TYPE DU MOTEUR - MOTOR TYP - TIPO MOTOR	Monofase - Monophase - Monophasé - Einphasen - Monofásico	
TENSIONE - VOLTAGE - TENSION - SPANNUNG - TENSIÓN	220 V	220 V
FREQUENZA - FREQUENCY - FRÉQUENCE - FREQUENZ - FRECUENCIA	50 Hz	50 Hz
POTENZA MOTORE - ENGINE POWER - PUISSANCE DU MOTEUR - LEISTUNGS-AUFNAHME - POTENCIA MOTOR	900 W - 1,21 HP	1900 W - 2,55 HP
PORTATA MAX. - MAX. LIFTING CAPACITY - CHARGE MAX. - LAST MAX. - CAPACIDAD	200 kg	300 kg
TIRO UTILE - CABLE LENGTH - CHARGE UTILE - ARBEITSHÖHE/SEILLANGE - ALTURA DE ELEVACIÓN	80 - 40 m	80 - 40 m
VELOCITÀ DI SALITA - LIFTING SPEED - VITESSE DE LEVAGE - AUFSTIEGSGESCHWINDIGKEIT - VELOCIDAD DE ELEVACIÓN	23 m/min	21 m/min
DIAMETRO FUNE - STEEL CABLE DIAMETER - DIAMÈTRE DU CÂBLE - SEILDURCHMESSER - DIAMETRO DEL CABLE	5 mm	6 mm
PESO ELEVATORE - HOIST WEIGHT - POIDS DU TREUIL - GEWICHT - PESO	53 kg	74 kg
DIMENSIONI - DIMENSIONS - DIMENSIONS - ABMESSUNG - DIMENSIONES	mm 800x300x435 h	mm 800x300x435 h
TIRO UTILE MAX. - MAX. CABLE LENGTH - CHARGE UTILE MAX. - ARBEITSHÖHE/SEILLANGE MAX. - ALTURA DE ELEVACIÓN MAX.	100 m	120 m