


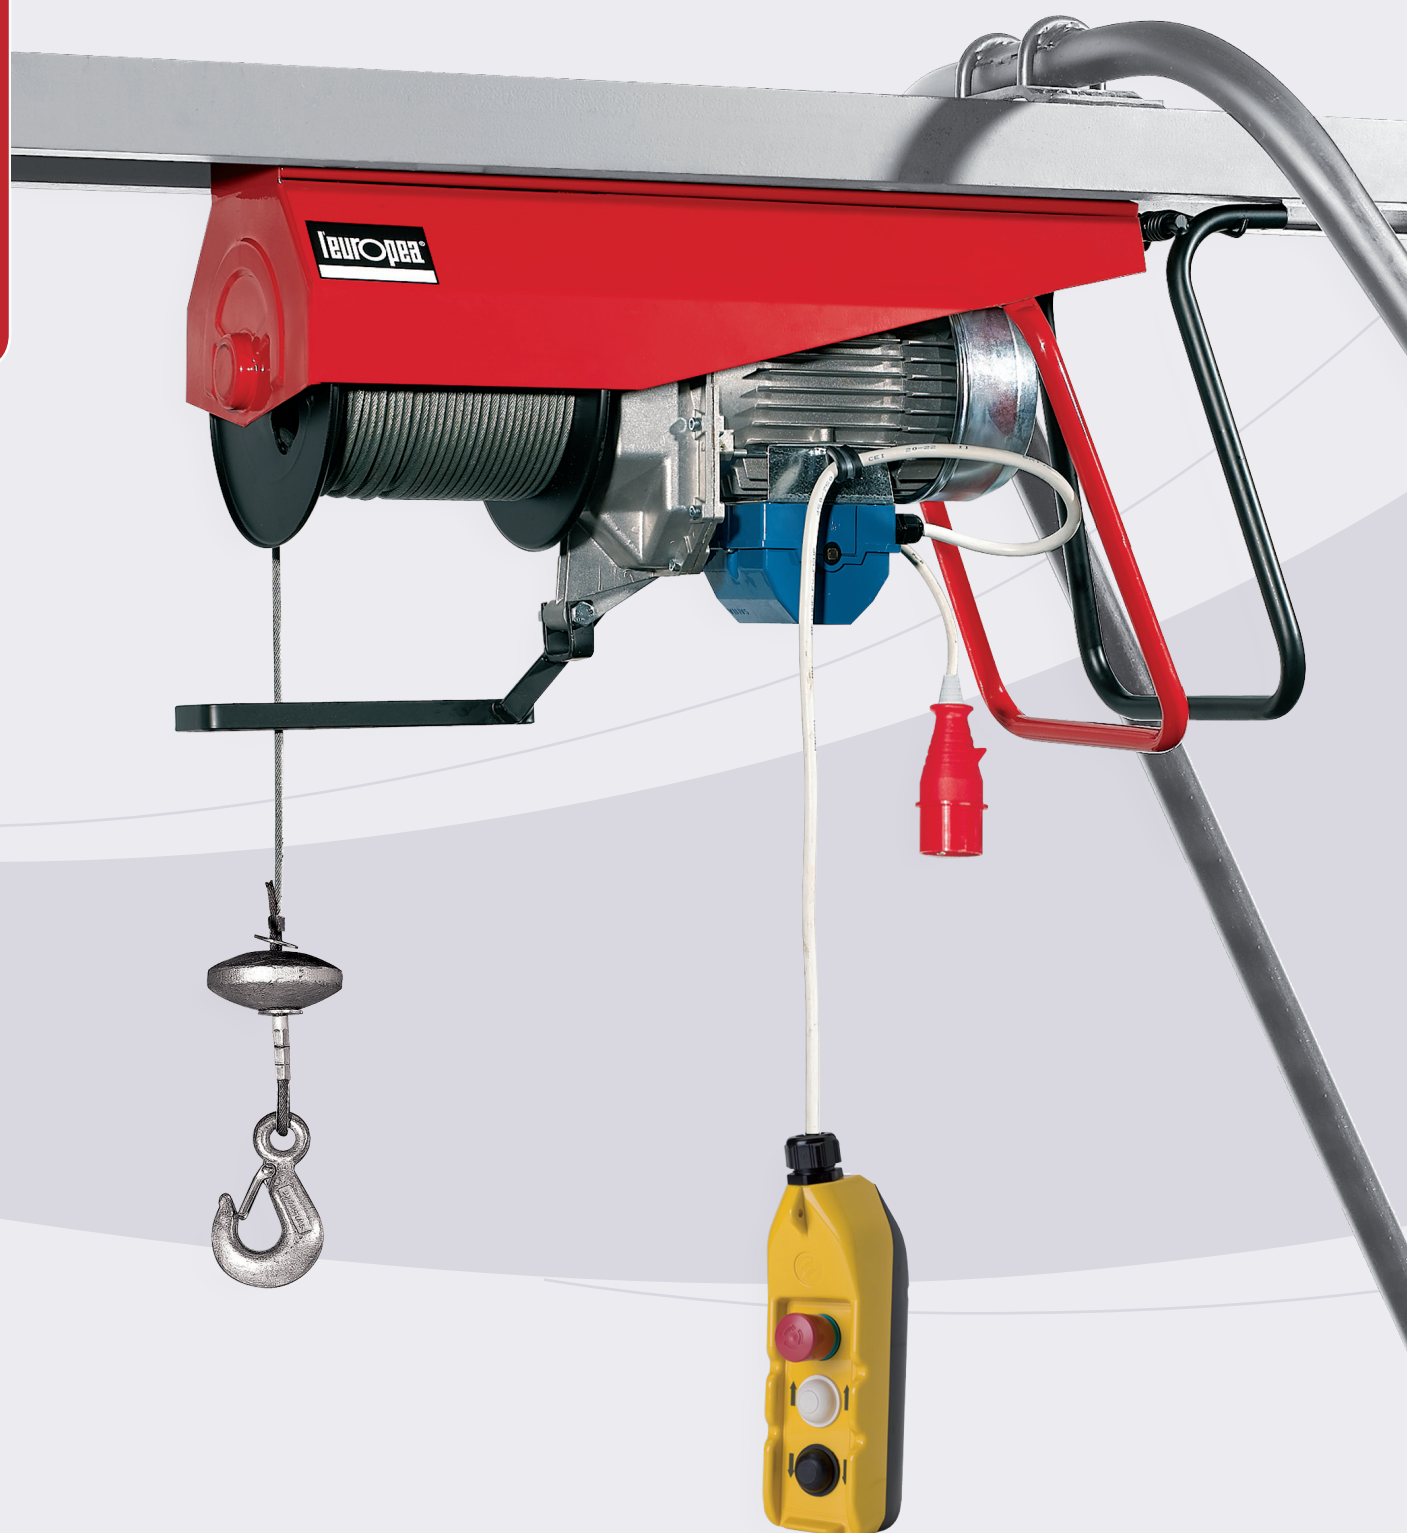

*CED

Telecomando a 24v
24v Remote Control Wired
Telecommande avec 24v
Fernbedienung 24v
Telecomando a 24v

HE 500 TF

VERSIONI - VERSIONS - MODÈLES - AUSFÜHRUNGEN - VERSIONES

HE 500 TF Pulsantiera
Cod. HE500T25P0

HE 500 TF Invertitore
Cod. HE500T25I0

HE 500 TF CED
Cod. HE500T25C5

ACCESSORI - ACCESSORIES - ACCESSOIRES - ZUBEHÖR - ACCESORIOS



Cod. S145817507


CED TRIFASE Comando Elettrico a Distanza a bassa tensione

THREE-PHASE remote-control with low voltage

CED TRIPHASE Commande électrique à distance à basse tension

Elektrische DREIPHASEN-fernsteuerung mit Niederspannungs-druckknopftafel

CED TRIFÁSICO - Mando eléctrico a distancia con botonera de mando de baja tensión

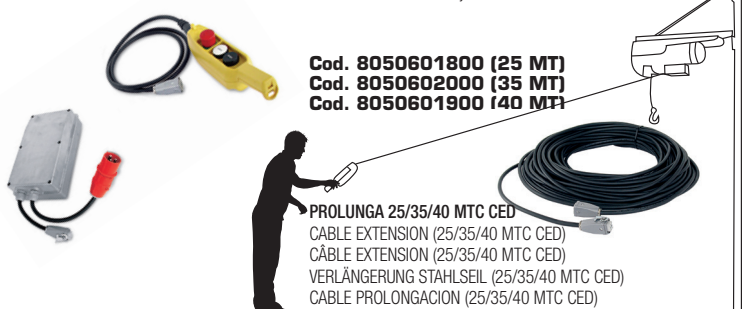

Cod. 8050601800 (25 MT)
Cod. 8050602000 (35 MT)
Cod. 8050601900 (40 MT)

PROLUNGA 25/35/40 MTC CED
CABLE EXTENSION (25/35/40 MTC CED)
CÂBLE EXTENSION (25/35/40 MTC CED)
VERLÄNGERUNG STAHLSEIL (25/35/40 MTC CED)
CABLE PROLONGACION (25/35/40 MTC CED)

Cod. S123200000



FRENO DI STAZIONAMENTO
PARKING BRAKE
FREIN DE STATIONNEMENT
FESTSTELLBREMSE
FRENO DE ESTACIONAMIENTO

Cod. 0002800000 (lt 80)
Cod. 0002150000 (lt 150)



SECCHIONI lt. 80/150
80/150 LITRE BUCKET
BENNE DE 80/150 LITRES
EIMER 80/150 LITER
CUBO GRANDE DE 80/150 LITROS


Cod. 0003200000



SECCHIONI lt. 200
200 LITRE BUCKET
BENNE DE 200 LITRES
EIMER 200 LITER
CUBO GRANDE DE 200 LITROS


Cod. AHECVA0035

CAVALLETTO
TRESTLE
CHEVALET
TRAGGERÜST
CABALLETE

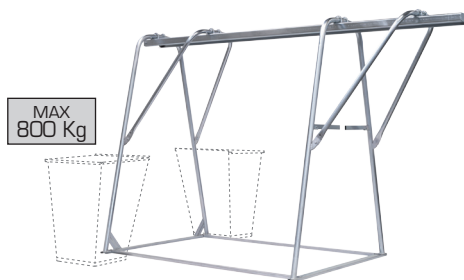

Cod. 9200827000

ZAVORRAGGIO
BALLAST
LEST
BALLASTÜBERNAHME
CONTRAPESO



MODELLO - MODEL - MODÈLE - MODELL - MODELO

HE 500 TF

TIPO MOTORE - MOTOR TYPE - TYPE DU MOTEUR - MOTOR TYP - TIPO MOTOR	TRIFASE - THREEPHASE - TRIPHASE - DREIPHASEN - TRIFÁSICO
TENSIONE - VOLTAGE - TENSION - SPANNUNG - TENSIÓN	220/380 V
FREQUENZA - FREQUENCY - FRÉQUENCE - FREQUENZ - FRECUENCIA	50 - 60 Hz
POTENZA MOTORE - ENGINE POWER - PUISSANCE DU MOTEUR - LEISTUNGS-AUFNAHME - POTENCIA MOTOR	1850 W
PORTATA MAX. - MAX. LIFTING CAPACITY - CHARGE MAX. - LAST MAX. - CAPACIDAD	500 KG
TIRO UTILE - CABLE LENGTH - CHARGE UTILE - ARBEITSHÖHE/SEILLÄNGE - ALTURA DE ELEVACIÓN	25 M
VELOCITÀ DI SALITA - LIFTING SPEED - VITESSE DE LEVAGE - AUFSTIEGSGESCHWINDIGKEIT - VELOCIDAD DE ELEVACIÓN	24 M/MIN
DIAMETRO FUNE - STEEL CABLE DIAMETER - DIAMÈTRE DU CÂBLE - SEILDURCHMESSER - DIAMETRO DEL CABLE	7 MM
PESO ELEVATORE - HOIST WEIGHT - POIDS DU TREUIL - GEWICHT - PESO	50 KG
DIMENSIONI - DIMENSIONS - DIMENSIONS - ABMESSUNG - DIMENSIONES	MM 860 x 320 x 530 H
TIRO UTILE MAX - MAX. CABLE LENGTH - CHARGE UTILE MAX. - ARBEITSHÖHE/SEILLÄNGE MAX. - ALTURA DE ELEVACIÓN MAX.	40 M