



***CED**

Telecomando a 24v
24v Remote Control Wired
Telecommande avec 24v
Fernbedienung 24v
Telecomando a 24v

HE 800 TF

VERSIONI - VERSIONS - MODÈLES - AUSFÜHRUNGEN - VERSIONES

HE 800 TF Pulsantiera - T.D.
Cod. HE800T25P0

HE 800 TF Invertitore - T.D.
Cod. HE800T25I0

HE 800 TF CED - T.D.
Cod. HE800T25C3

ACCESSORI - ACCESSORIES - ACCESSOIRES - ZUBEHÖR - ACCESORIOS



Cod. S145817507


CED TRIFASE Comando Elettrico a Distanza a bassa tensione

THREE-PHASE remote-control with low voltage

CED TRIPHASE Commande électrique à distance à basse tension

Elektrische DREIPHASEN-fernsteuerung mit Niederspannungs-druckknopf-tafel

CED TRIFÁSICO - Mando eléctrico a distancia con botonera de mando de baja tensión

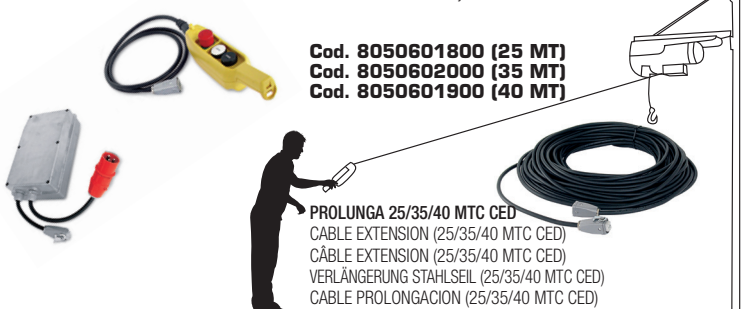

Cod. 8050601800 (25 MT)

Cod. 8050602000 (35 MT)

Cod. 8050601900 (40 MT)

PROLUNGA 25/35/40 MTC CED

CABLE EXTENSION (25/35/40 MTC CED)

CÂBLE EXTENSION (25/35/40 MTC CED)

VERLÄNGERUNG STAHLSEIL (25/35/40 MTC CED)

CABLE PROLONGACION (25/35/40 MTC CED)

Cod. S123200000



FRENO DI STAZIONAMENTO

PARKING BRAKE

Frein de stationnement

FESTSTELLBREMSE

FRENO DE ESTACIONAMIENTO

Cod. 0002800000 (lt 80)

Cod. 0002150000 (lt 150)



SECCHIONI lt. 80/150

80/150 LITRE BUCKET

BENNE DE 80/150 LITRES

EIMER 80/150 LITER

CUBO GRANDE DE 80/150 LITROS

Cod. 0003200000



SECCHIONI lt. 200

200 LITRE BUCKET

BENNE DE 200 LITRES

EIMER 200 LITER

CUBO GRANDE DE 200 LITROS

Cod. AHECVA0035


CAVALLETTO

TRESTLE

CHEVALET

TRAGGERÜST

CABALLETE

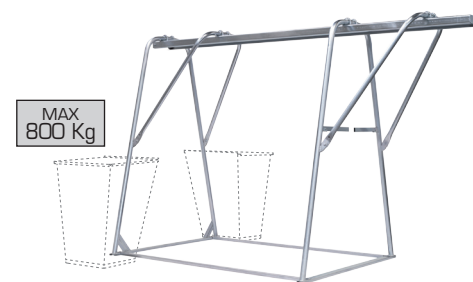

MAX
800 Kg

Cod. 9200827000


ZAVORRAGGIO

BALLAST

LEST

BALLASTÜBERNAHME

CONTRAPESO



MAX
800 Kg

MODELLO - MODEL - MODÈLE - MODELL - MODELO

HE 800 TF - T.D.

TIPO MOTORE - MOTOR TYPE - TYPE DU MOTEUR - MOTOR TYP - TIPO MOTOR

TRIFASE - THREEPHASE - TRIPHASE - DREIPHASEN - TRIFÁSICO

TENSIONE - VOLTAGE - TENSION - SPANNUNG - TENSIÓN

220/380 V

FREQUENZA - FREQUENCY - FRÉQUENCE - FREQUENZ - FRECUENCIA

50 - 60 Hz

POTENZA MOTORE - ENGINE POWER - PUISSANCE DU MOTEUR - LEISTUNGS-AUFNAHME - POTENCIA MOTOR

1850 W

PORTATA MAX. - MAX. LIFTING CAPACITY - CHARGE MAX. - LAST MAX. - CAPACIDAD

800 KG

TIRO UTILE - CABLE LENGTH - CHARGE UTILE - ARBEITSHÖHE/SEILLÄNGE - ALTURA DE ELEVACIÓN

25 M

▶ VELOCITÀ DI SALITA - LIFTING SPEED - VITESSE DE LEVAGE - AUFSTIEGSGESCHWINDIGKEIT - VELOCIDAD DE ELEVACIÓN

12 M/MIN

DIAMETRO FUNE - STEEL CABLE DIAMETER - DIAMÈTRE DU CÂBLE - SEILDURCHMESSER - DIAMETRO DEL CABLE

6 MM

PESO ELEVATORE - HOIST WEIGHT - POIDS DU TREUIL - GEWICHT - PESO

60 KG

DIMENSIONI - DIMENSIONS - DIMENSIONS - ABMESSUNG - DIMENSIONES

MM 860 x 320 x 570 H

▶ TIRO UTILE MAX - MAX. CABLE LENGTH - CHARGE UTILE MAX. - ARBEITSHÖHE/SEILLÄNGE MAX. - ALTURA DE ELEVACIÓN MAX.

40 M

T.D. = TIRO DOPPIO - DOUBLE THROW - TIR DOUBLE - DOPPELZUG - TIRO DOBLE