

HE 1600 TF



*CED

Telecomando a 24v
24v Remote Control Wired
Telecommande avec 24v
Fernbedienung 24v
Telecomando a 24v

Solo per vendita Extra EU
Extra EU sales only
Seulement pour ventes hors UE
Nur für den vertrieb im ausland EU
Solamente para exportación fuera la UE

HE 1600 TF

VERSIONI - VERSIONS - MODÈLES - AUSFÜHRUNGEN - VERSIONES

HE 1600 TF
Cod. HE1600D70P0

HE 1600 TF CED
Cod. HE1600D70C0

ACCESSORI - ACCESSORIES - ACCESSOIRES - ZUBEHÖR - ACCESORIOS

Cod. 9042606900


CED TRIFASE Comando Elettrico a Distanza a bassa tensione

THREE-PHASE remote-control with low voltage

CED TRIPHASE Commande électrique à distance à basse tension

Elektrische DREIPHASEN-fernsteuerung mit Niederspannungs-druckknopf

CED TRIFÁSICO - Mando eléctrico a distancia con botonera de mando de baja tensión

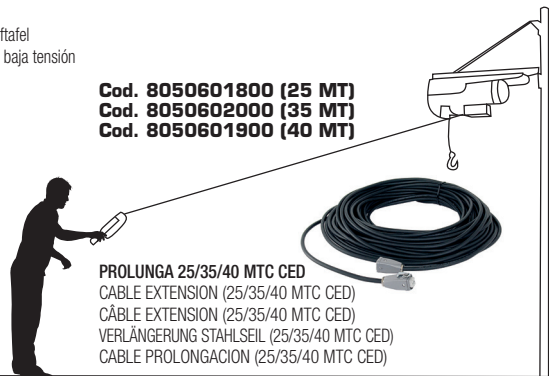

Cod. 8050601800 (25 MT)
Cod. 8050602000 (35 MT)
Cod. 8050601900 (40 MT)

PROLUNGA 25/35/40 MTC CED
CABLE EXTENSION (25/35/40 MTC CED)
CÂBLE EXTENSION (25/35/40 MTC CED)
VERLÄNGERUNG STAHLSEIL (25/35/40 MTC CED)
CABLE PROLONGACIÓN (25/35/40 MTC CED)

Cod. 0003200000



SECCHIONI It. 200
200 LITRE BUCKET
BENNE DE 200 LITRES
EIMER 200 LITER
CUBO GRANDE DE 200 LITROS

Cod. 0000870


CAVALLETTO

TRESTLE

CHEVALET

TRAGGERÜST

CABALLETE

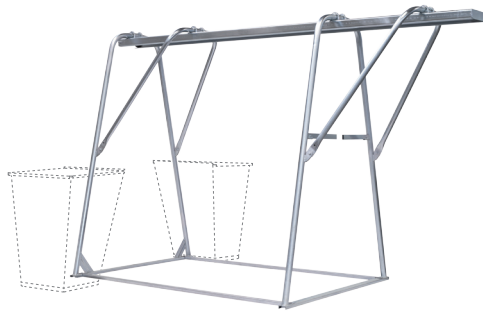

MAX
1600 Kg

Cod. 9200827000


ZAVORRAGGIO

BALLAST

LEST

BALLASTÜBERNAHME

CONTRAPESO



MAX
1600 Kg

MODELLO - MODEL - MODÈLE - MODELL - MODELO

HE 1600 TF - T.D.

TIPO MOTORE - MOTOR TYPE - TYPE DU MOTEUR - MOTOR TYP - TIPO MOTOR	TRIFASE - THREEPHASE - TRIPHASE - DREIPHASEN - TRIFÁSICO
TENSIONE - VOLTAGE - TENSION - SPANNUNG - TENSIÓN	220/380 V
FREQUENZA - FREQUENCY - FRÉQUENCE - FREQUENZ - FRECUENCIA	50 - 60 Hz
POTENZA MOTORE - ENGINE POWER - PUISSANCE DU MOTEUR - LEISTUNGS-AUFNAHME - POTENCIA MOTOR	3,72 Kw
PORTATA MAX. - MAX. LIFTING CAPACITY - CHARGE MAX. - LAST MAX. - CAPACIDAD	1600 KG
TIRO UTILE - CABLE LENGTH - CHARGE UTILE - ARBEITSHÖHE/SEILLÄNGE - ALTURA DE ELEVACIÓN	40 M
VELOCITÀ DI SALITA - LIFTING SPEED - VITESSE DE LEVAGE - AUFSTIEGSGESCHWINDIGKEIT - VELOCIDAD DE ELEVACIÓN	11,5 M/MIN
DIAMETRO FUNE - STEEL CABLE DIAMETER - DIAMÈTRE DU CÂBLE - SEILDURCHMESSER - DIAMETRO DEL CABLE	8 MM
PESO ELEVATORE - HOIST WEIGHT - POIDS DU TREUIL - GEWICHT - PESO	67 KG
DIMENSIONI - DIMENSIONS - DIMENSIONS - ABMESSUNG - DIMENSIONES	MM 755 x 280 x 430 H

T.D. = TIRO DOPPIO - DOUBLE THROW - TIR DOUBLE - DOPPELZUG - TIRO DOBLE